

**POM | KEPITAL F20-03 | Grade**

- KEPITAL F20-03 ( Type) Grade .  
 - 가 Grade .

	ISO 1183	g/cm <sup>3</sup>	1.41
	ISO 1133	g/10min	9
(23 , 50 %RH)	ISO 62	%	0.2

(1.8 MPa)	ISO 75		100
	UL 94	-	HB
	ISO 11357		165
	ISO 11359	X 10 <sup>-5</sup> /	12


	ISO 527	MPa	2,750
	ISO 527	MPa	65
	ISO 527	%	10
	ISO 527	%	32
	ISO 178	MPa	87
	ISO 178	MPa	2,550
Charpy (Notched, 23 )	ISO 179/1eA	kJ/m <sup>2</sup>	6.5
Charpy (Notched, -30 )	ISO 179/1eA	kJ/m <sup>2</sup>	5.5

	IEC 60093		1x10 <sup>16</sup>
	IEC 60093	• cm	1x10 <sup>14</sup>
	IEC 60243-1	kV/mm	19

( , t = 2 mm)	ISO 294-4	%	2.0
---------------	-----------	---	-----

	ISO 1043	-	POM
--	----------	---	-----

Revision No : 8 (2020-04-03)

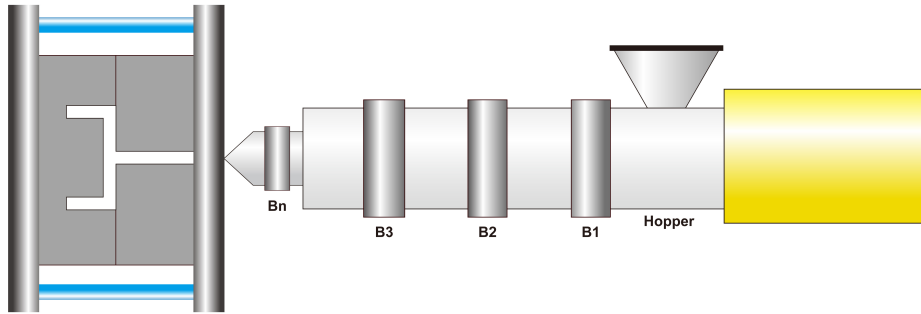

( : 0.1 %)

80 ~ 90 3 h ~ 4 h

: 60 ~ 80 (140 ~ 176 )  
: 170 ~ 210 (338 ~ 410 )

Mold	Bn(Nozzle)	B3(Metering)	B2(Compression)	B1(Feeding)	Hopper
60 ~ 80	180 ~ 210	190 ~ 200	180 ~ 190	170 ~ 180	60 ~ 80

: 150 mm/s ~ 200 mm/s  
: Maximum 20 bar

94(OCI , 14 )  
Tel 02-728-7441~8, Fax 02-714-9235

84  
Tel 052-279-7831~2, Fax 052-279-7889

166, 104 201 ( , )  
SK )  
Tel 031- 436 -1300, Fax 031- 436 -1301

1 82  
Tel 031- 691-3003, Fax 031- 691-3896

1. 가 가 ,  
( ) Implants ,
2. 가 , , , , ,  
가 , , , , , 가